



# JOTUN

Jotun Protects Property


**WHEN EVERY DEGREE  
COUNTS, THERMOSAFE YOUR  
ASSETS TO THE EXTREME.**

**TH**  **ERMO**  
**SAF** 

*Applied Performance*

# START APPLYING MORE PERFORMANCE TO YOUR ASSETS.

The products in the Thermosafe range are proven to enhance overall operational efficiency and on-site safety, in the extreme environments of offshore and onshore oil, gas and petrochemical facilities. With a range of products to fit your specific requirements, Thermosafe protective coatings work for you, not against you. If you want to safeguard your assets and enhance performance, work a little smarter. Apply Jotun's Thermosafe.

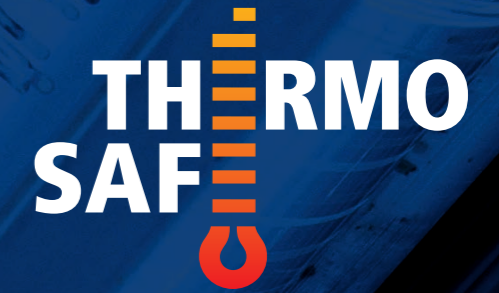

## KEY

- Thermal exposure
- Corrosion
- Shut-downs
- Fire

### Jotatemp | 250

Protection is a given. Savings are your bonus.

If you only need 50 degrees more, why pay for 450? Our unique composite coating will give you full service performance at temperatures all the way from cryogenic to 250°C without having to opt for more exotic materials.



### Jotatemp | 540 ZINC

Going where no zinc silicate has gone before.

Jotatemp 540 Zinc is the only zinc silicate on the market that has been specifically designed for use on high temperature areas, all the way up to 540°C.



### Jotatemp | 1000

From -196°C to 1,000°C. No problem.

Optimized for carbon steel. From the lowest temperatures of liquid gas, to the highest temperatures of burning hydrocarbons, Jotatemp 1000 performs to the extremes before, during and after installation.



### Jotatemp | 1000 HT

From -196°C to 1,000°C. No problem.

Optimized for stainless steel, alloyed steel (P91) and ceramic substrates. From the lowest temperatures of liquid gas, to the highest temperatures of burning hydrocarbons, Jotatemp 1000 HT performs to the extremes before, during and after installation.



### Jotachar

*Fast, safe, certified.*

Protect against fire. No mesh. No fuss.

With an advanced fibre matrix in the formulation, Jotachar delivers all the fire protection you will ever need, certified.



#### Temperature range

-196°C (Cryogenic)	120°C	250°C	540°C	1000°C
	Jotatemp 540 Zinc*			
Jotatemp 1000				
Jotatemp 1000 HT				
Jotatemp 250				

\*Can be used under insulation only in a system with Jotatemp 1000 on top.

Jotun A/S  
P.O. Box 2021  
N-3202 Sandefjord, Norway  
Tel: +47 33 45 70 00  
jotun.com

