


Thermosafe product assortment

Recommended use

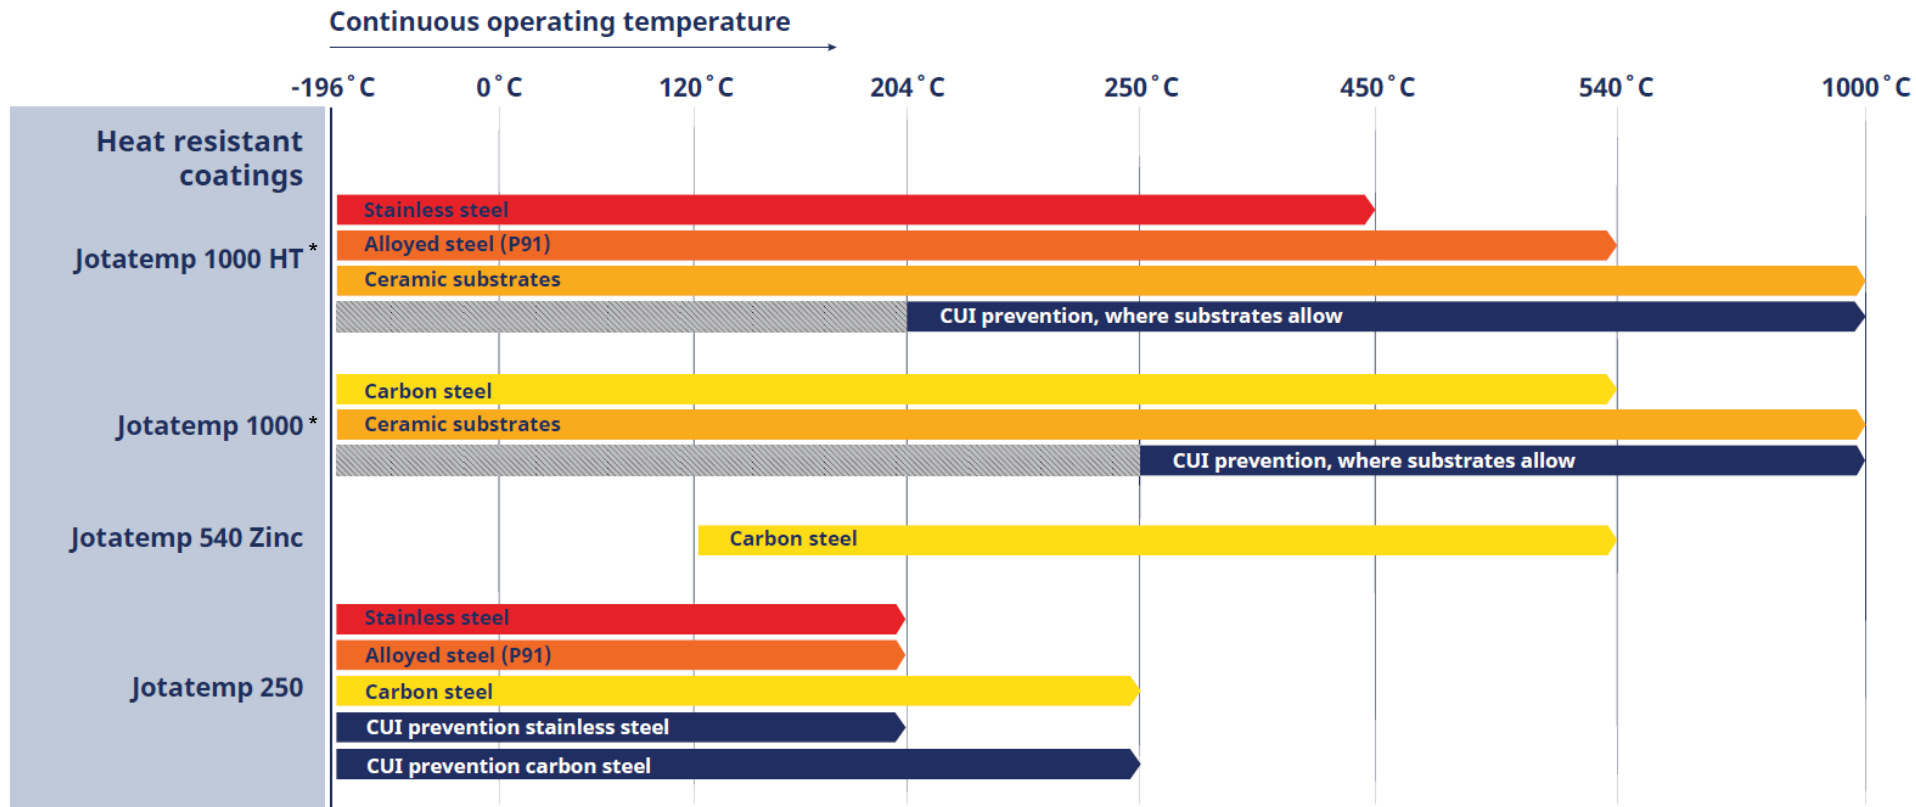

Jotachar
Fast, safe, certified.

Intumescent fire protection

*Jotatemp 250 is preferred for temperature ranges up to 250°C on carbon steel and 204°C for stainless steel and alloyed steel (P91) passing both ISO 19277-2018 CUI-2 Cryo and CUI-3 Cryo.

